


TYPICAL GARBAGE CAN RACK CONSTRUCTION

Garbage containers outside the establishment shall be stored either on a concrete slab, or on a rack which is at least 12" above the ground for a single bank of containers, or 18" above the ground for a multiple bank of containers.

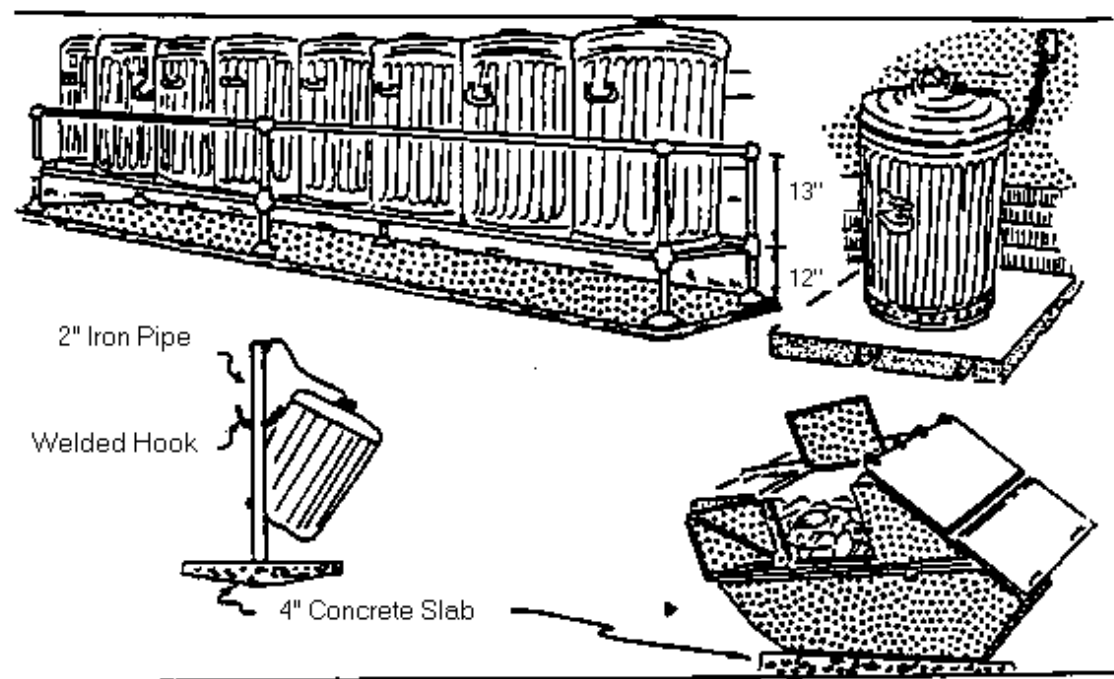

Garbage can storage area should be located adjacent to the garbage can wash area.

If dumpster unit is used, all doors must be fly-tight and must be kept closed except for dumping and filling. A concrete pad must be provided to set unit on. Some provisions must be made for cleaning dumpster after it is emptied.